



TEMPEST TIC 3.1X NFPA

High Resolution Thermal imaging camera



Efficient and small = 1 button + 3.5" display

Particularly suitable for the first attack. LEADER TIC 3.1X offers unbeatable value and best quality, ideal for firefighting, first attack, search for missing persons and fire...



Outstanding features:

- **Compact** 6.69 x 5.83 x 3.66 inches
- **Lightweight** 2.07 lbs with 2 batteries.
- **Large 3,5" display** for details visibility
- **Widest detection range:** -40°F to +2100°F
- **1 colorization mode**
- **Video recording** (option)
- **Batteries:** 6 year warranty, 5000 charging cycle
- **Safe batteries (LiFePO4):** for high temp operations
- **Up to 8h running time** (2 batteries) with integrated Eco-Boost-System
- **Germanium window to protect the optics**
- **Removable Pistol grip** option
- **Boot time: less than 5 sec**
- **1 Large button:** easy to operate even with gloves




NFPA 1801:2018



Color schemes:

TEMPEST TIC 3.1X offers one **color scheme: Fire** (standard).

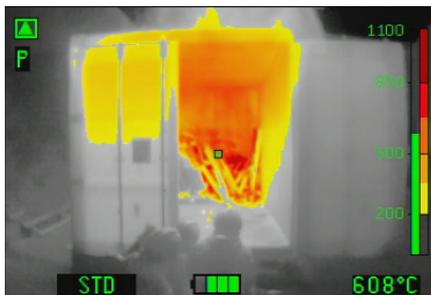

FIRE (STD):
 Dark Red >1560°F
 Red > 1250°F
 Orange > 930°F
 Dark Yellow >660°F
 Yellow > 400°F
 White = Hot
 Black = Cold

3 Sensitivity modes with automatic switch according observed scene:

- High sensitivity temperature range: -40 +300°F
- Medium sensitivity temperature range: -40 + 950°F
- Low sensitivity temperature range: -40 +2100°F

As part of our policy of constantly researching to improve our equipment, we reserve the right to change the characteristics of our apparatus at any time without prior notice. ZF.07.343.US.2



Characteristics:

Leader TIC 3.1X with Eco-Boost-System	
Dimensions (approx.)	L6.69 x W5.83 x H3.66 inches (H= +4.33" with optional pistol grip)
Weight	2.07 lbs with 2 batt / 1.88 lbs with 1 batt (+0.37 lbs with optional pistol grip)
Display	3,5" LCD / 320 x 240 (76 800) px / Backlighting / Brightness: 800 cd/m ²
Frequency	60Hz Fps
T°C Range	-40° to +2100°F
Colorization	Std: Fire
Housing	
Material	PUR / Elastomer housing with silicon boot around display
Drop Test	6.5ft on concrete
IP	IP67 / 3.2ft Meter 30 Minutes
Heat resistance	300°F for 15min / 500°F for 5min
Sensor	
Micro bolometer type	Uncooled 17μ Amorphous Silicon aSi Resolution 384 x 288 (110 592 px)
Spectral range	7 – 14 μm
T°C sensitivity	NETD: <50mK (<0.05°C)
Optics	
Material	Germanium Carbon Coated Protected by a germanium window
Focus	1.15ft to infinity / F/1.3 speed
Visual field / FOV	H: 51° / V: 40° / Diagonal: 65°

General	
Rechargeable batteries	LiFePO ₄ (Lithium Iron Phosphate = safety VS fire), 2.5Ah at 6.6V, 0.19lbs
Running time (20°C) with Eco-Boost-System since October 2018	Without video/photo functions: >8h (2 batt) / >4h (1 batt) With video/photo functions: >6h (2 batt) with non-active video >5h (2 batt) with recording video
Boot time	< 5 seconds
Charging voltage	12-24 VDC or 100-240 VAC
Charging time (for 2 batt / half for 1 batt)	Charging bay: ~1h30 Mains charger: 100% in ~2h, 90% in ~1h30, 80% in ~1h20
Charging cycles	> 5000
Memory (optional)	8GB internal SD card (8h video)
Warranty	5 years on camera / 6 years on batteries / 10 years on thermal sensor / 1 year on accessories (chargers, charging bay, etc...)
Certifications	NFPA1801:2018 and ISA12.12.01 / CSA C22.2 N°213 and CE
Options	
Removable pistol grip	Automatic video recording (8GB capacity) at start ON
Neck strap in flame retardant material	Vehicle charging bay or mains charger
1 or 2 Retractable lanyards	Carrying case IP67
Protection hood	Wireless video transmission to computer, tablet or smartphone



Energy concept

LiFePO₄ batteries (lithium-iron-phosphate).


Benefits:

- Very long lifespan guaranteed 5000 charging cycles (~10 years)
- Operating time (up to 8h with 2 batteries at the same time in the camera)

Picture capture & Video recording

Pictures (up to 1000) and Video (up to 8h) can be:

- viewed on the camera screen during operation
- Live Pictures can be sent to a computer, tablet or smartphone thanks to optional wireless stick.
- Downloaded into a computer via a USB cable

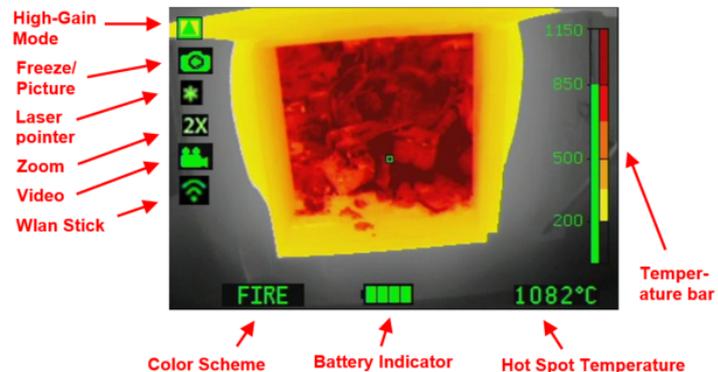

Vehicle Charging Bay

Very space-saving mountable! Power supply 12/24 VDC or 100-240 VAC. Can charge up to 4 batteries at the same time (2 in the camera and 2 spares)



As part of our policy of constantly researching to improve our equipment, we reserve the right to change the characteristics of our apparatus at any time without prior notice.
ZF.07.343.US.2



Camera standard features:

Designation	Color modes		Features					
	Color modes	Max color modes	Battery	Freeze mode	Side trap	Video recording	Picture capture	USB cable
LEADER TIC 3.1X (1CS)	Fire (std.)		2		No, but available attachment points for zippers and/or neck strap			
LEADER TIC 3.1X (V)	Fire (std.)		2			Automatic recording at start ON		√

P = Picture

V = Video + Picture

Camera optional accessories:

	Wireless Transmission kit (to come)	Only compatible with cameras equipped with Video recording		Vehicle charging bay with additional slots	Charge batteries in the camera + 2 extra spare batteries
	Pack of 2 spare batteries			Power supply for charging bay	Exist in 12/24V , 110V or 240V with US or EU plug
	Cable charger	Available in 12/24V , 110V or 240V		Retractable lanyard	500gr or 1000gr tension force
	Watertight Carrying case	IP67		Neck strap	Fire-proof (Kevlar)
	Vehicle charging bay	Charge batteries inside the camera		Protection hood (to come)	Increases exposure time x2 to high temperatures
				Removable pistol grip	Pistol grip = 0.37 lbs Incl. mounting tool



As part of our policy of constantly researching to improve our equipment, we reserve the right to change the characteristics of our apparatus at any time without prior notice.
ZF.07.343.US.2

TEMPEST
Fighting for performance