



NEW !

**MONITOR
NOZZLE**

FlowMatic

Monitor nozzle

Superior Stream quality: Wide Fog pattern for good thermal protection

FlowMatic: automatic monitor nozzle

- The FlowMatic has a 100 PSI (7 bar) pressure regulation system.
- The range of flowrates goes from:
 - 100 to 500GPM for FlowMatic 500G
 - 200 to 750GPM for FlowMatic 750G
- Regulated pressure means a relatively constant reach.
- The Wide fog pattern forms a very effective protective shield.
- Polyurethane Bumper: resistant to high temperatures, hydrocarbons and aggressive chemicals
- Inlet 2"1/2 NH Female.




As part of our policy of constant research to improve our products, we reserve the right to modify our products' characteristics at any time without notice

Characteristics

Model	Item number	Dimensions	Weight	Flowrate @ 6bar	Inlet
FlowMatic 500G	CDA-020-SI	H: 7.9" / 20 cm (wide fog) H: 9" / 23 cm (straight stream) x Diam: 5.9" / 15 cm	7.9 lbs 3.6 kg	100 to 500 GPM	2.5" NH F
FlowMatic 750G	CDA-022-SI			200 to 750 GPM	

Curve: Flow vs Pressure

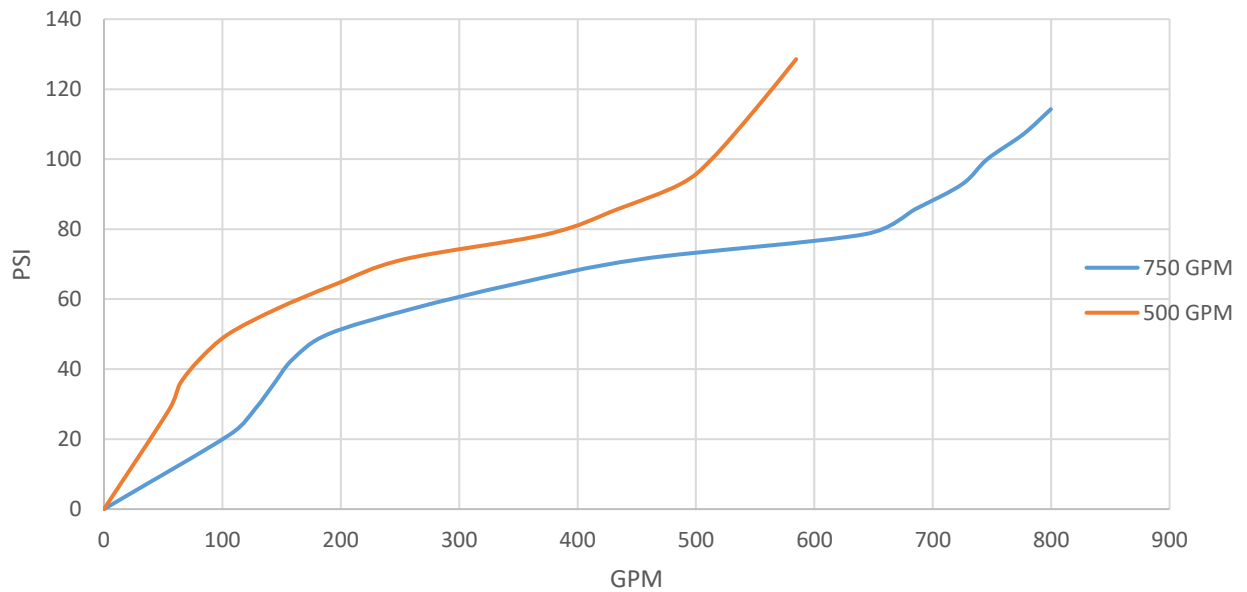

The Wide fog pattern forms a very effective protective shield.



Reduced cost of ownership:

Very light maintenance requirement due to the nozzle design and materials used.



ZF.02.296.US.1