



With flush at the bumper



With flush ring

**NEW !**

**AUTOMATIC  
NOZZLE**


# FlowMatic Compact

Automatic, controlled pressure variable flow nozzle

- PN40 = for high pressure application
- Body in Hard anodized Aluminum
- 6 positions (5 open + shut off) controlled by a wide flow handle for instantaneous reaction
- Adjustment of the full jet to the optimal spray angle in a quarter turn
- Stainless steel slide valve for keeping perfect stream quality
- Powerful full cone spray for smothering flames.
- Pulsing mode with opening at 2 bar
- Unbreakable teeth : No maintenance
- Polyurethane Bumper: resistant to high temperatures, hydrocarbons and aggressive chemicals
- Strainer to prevent large debris ingress.
- EN15182-2 certified



*Leader Nozzles are available in 3 different sizes:*



As part of our policy of constant research to improve our products, we reserve the right to modify our products characteristics at any time without notice


## Characteristics

Model	Ref. with flush at bumper	Ref. with flush ring	Weight	Flow rate	Pressure	Inlet
FlowMatic 125G		NAA-005-TI	1.75kg / 3.85 lbs	0 – 125 GPM	100 PSI	1.5" NPSH F
FlowMatic 125G	NAA-016-RI	NAA-006-RI				1.5" NH F

## Dimensions (less 2cm /0.8" for model with flush at bumper)

For 1.5" inlet versions: L. 11.4" x l. 4.7" x h. 9" / L. 29 x l. 12 x h. 23cm

## Curve: Flow vs Pressure

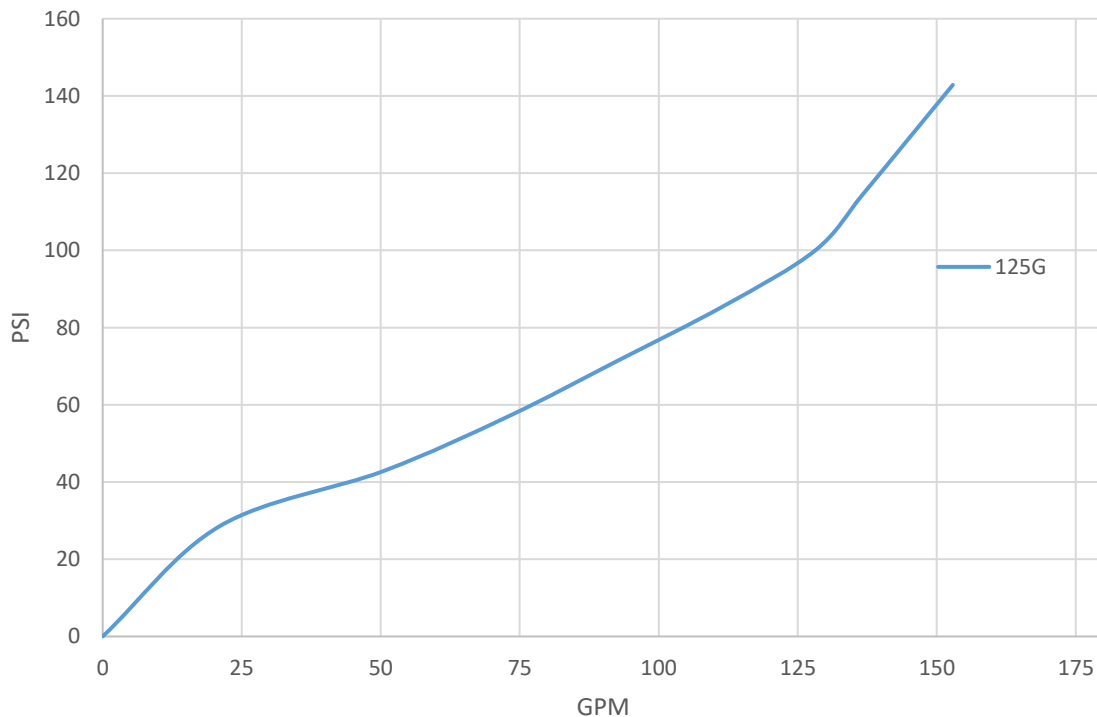

## Options

All coupling types  
Foam adapter  
Coloured (red, blue, yellow, green, orange) flow control handle and pistol grip covers (Multimatic are delivered as standard with blue covers)



**AA trigger version:**  
Flow handle lock, resettable in order to limit the maximum water flow

## Reduced cost of ownership:

Very light maintenance requirement due to the nozzle design and materials used.



ZF.01.289.US.2