
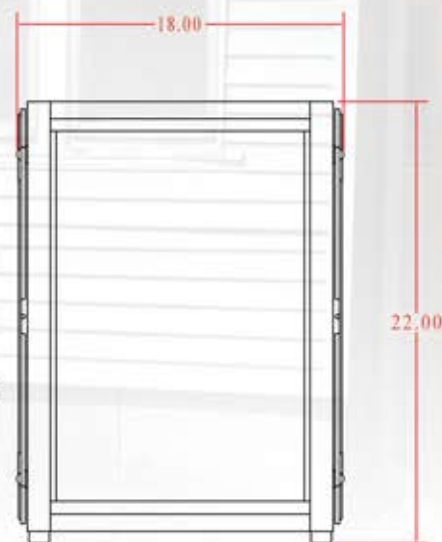


TEMPEST

Fighting for performance

GBS-18-HP Smoke Ejector

Tempest's GBS-18-HP (Smoke Ejector) is a popular unit for all forms of confined space ventilation, a design that's been used for decades. It's light and small enough to ventilate tight areas yet still built to Tempest's high standard of long lasting durability and reliability. The GBS's 5.5 HP Honda GX 200 engine delivers massive performance out of a compact footprint. Suck the smoke/fumes/particulates out from almost any location, or turn it around and blow them out.

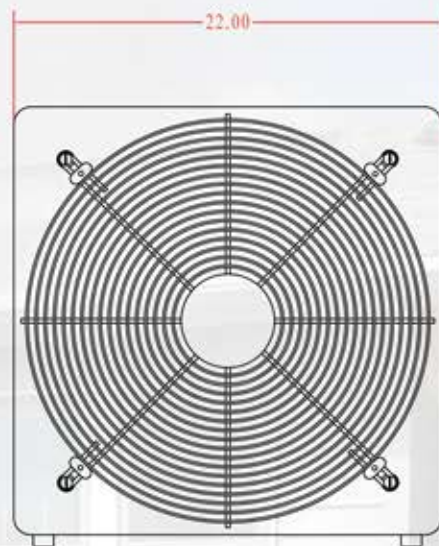

TYPE	Positive & Negative Pressure Ventilation Fan - Smoke Ejector with external throttle and engine controls.
DRIVE/MOTOR	Direct Drive Gasoline - Honda GX200
BLADE	18" Dia. Assembly Made Up of 8, AirFlex Fiberglass Reinforced Polyamide Blades or *Aluminum Alloy Blades
SHROUD	Integral Component of Frame
GRILLE	Continuous Circular Wound, Zinc-Plated Steel w/ 4 Tie Points for Additional Safety Meets UL & European CE Safety Standards
FRAME	Formed and Welded Sheet Metal Construction with Powder-Coat Finish
Fuel Tank	2 Liter



Airflex Composite Impeller



Honda GX200



Clip on Duct Hose Adapter



Welded Roll Cage Frame



Compact Size



Hang/Suspend



Part No.	Model No.	Dia.	HP	CFM	Dimensions (WxDxH)	Weight
Honda GX Motor						
911-1022	GB-18-S-5.5	18"	5.5	14,200	22.00"x 18.00"x 22.00"	76 lbs
911-1023	GB-18-S-5.5	18"	5.5	14,200	22.00"x 18.00"x 22.00"	76 lbs. *w/Aluminum Alloy Blades

HONDA
ENGINES

TECHNICAL SPECIFICATIONS

	PRODUCT FAMILY		POWER BLOWER™
	PRODUCT LINE & TYPE		SMOKE EJECTOR (GAS POWERED)
	MODEL		GB-18-S-5.5
	PART NO.		911-1022 / 911-1023*
OUTPUT	AIR VOLUME	[cfm/m³h]	14,200 / 24,125
	AIR VELOCITY	[mph/kph]	PENDING
	NOISE LEVEL @ 10 ft	[dB(A)]	92 to 98
FAN BLADE	TYPE		IMPELLER
	MATERIAL	911-1022	NYLON 6 W/ 30% GLASS-FIBER FILL
	MATERIAL	911-1023	ALUMINUM ALLOY*
	DIAMETER	[in/mm]	18 / 460
	NO. OF BLADES		8
DIMENSIONS	WEIGHT (DRY)	[lb/kg]	76 / 34.5
	WEIGHT (WET)	[lb/kg]	81 / 36.8
	WIDTH	[in/mm]	22 / 559
	DEPTH	[in/mm]	18 / 457
	HEIGHT	[in/mm]	22 / 559
ENGINE	MANUFACTURER		HONDA
	MODEL		GX200
	TYPE		AIR COOLED 4 STROKE OHV
	FUEL		(R=M)/2 - 86 OCTANE GASOLINE OR BETTER
	POWER OUTPUT	[HP/kW]	5.5* / 4.1
	FUEL CAPACITY	[gal/L]	0.82/ 3.1
	OIL CAPACITY	[qt/L]	0.63 / 0.60
	RUN TIME	[h]	1.5
FRAME	TYPE		WELDED ROLL CAGE BOX TYPE
	MATERIAL		STEEL
	COATING		POWDER COAT
	DEFAULT COLOR		RED
	HANDLE		0.75 INCH ROUND STRUCTUAL FRAME MEMBERS
FRONT GRILL	MATERIAL		SPIRAL WELDED STEEL WIRE
	NO. OF TIE POINTS		4
	STANDARDS		MEETS EUROPEAN CE SAFETY STANDARDS
	COATING		POWDER COAT
	DEFAULT COLOR		BLACK

Periods Used to Designate Decimal Points

100920.01A